


H07Z-U H07Z-R

450/750 V halojensiz, alev geciktiricili,
tek damarlı kablolar

450/750V halogen free, flame retardant,
single core cables

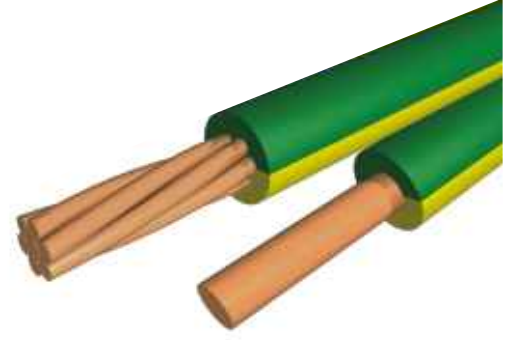

Standartlar / Standards

- TS HD 22.9 •BS 7211
- VDE 0282-9

UK Kodu / UK Code

6491B

Ürün Belgeleri / Product Certificates

Uygulama Alanı / Application

Sıva üzeri, sıva altında, kanal içinde veya benzer kapalı sistemlerde kullanılır. Yangında düşük seviyede duman ve zehirli gaz çıkartma özelliğine sahiptir.

Installation in surface mounted or embedded conduits or similar closed systems. Low level of emission of smoke and corrosive gases in case of fire.

Yapısı / Construction

Cu/XL-LSZH

- 1- İletken / Conductor: Bakır / Copper
- 2- İzole / Insulation: XL-LSZH

Teknik veriler / Technical Datas

Max. çalışma sıcaklığı 90 °C
Max. kısa devre sıcaklığı 160 °C

*Max. operating temperature 90 °C
Short circuit temperature 160 °C*



-20 / +90 °C



Halogen free
IEC 60754-1



Low toxicity
IEC 60754-1



Low corrosivity
IEC 60754-2



Low smoke
IEC 61034



Flame retardant
IEC 60332-1-2

