


Accessories Slim Interface Relay SNR

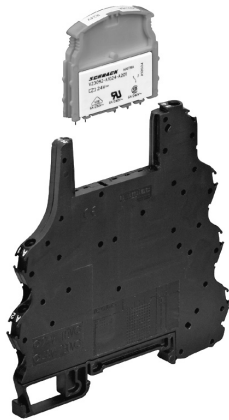

F0222-B

Features


- Module width 5.08 mm
- Reduced system width for increased packing density on the DIN rail
- Jumper bars

Dimensions in mm



Technical data

Rated current / rated voltage	6 A / 250 Vac
Dielectric strength coil-contact	>4000 V _{rms}
Insulation category (VDE 0110b)	C / 250
Ambient temperature	-20...55 °C
Protection category	IP 20
Protection against accidental contact meets	VBG 4
Wire cross section with/without bootlace crimp	0.22...2.5mm ²
Terminal torque nom./max.	0.4 / 0.6 Nm
Packaging unit	10 pcs.

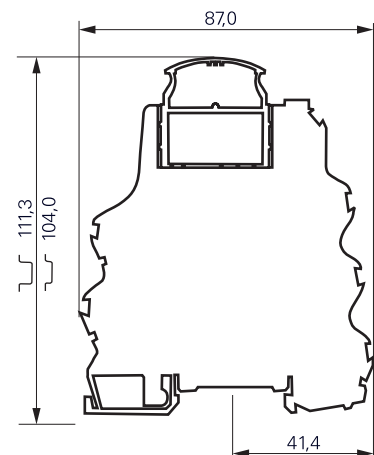

Accessories

Product code	
ST 1F 000	Socket without LED
ST 1F L24	Socket with LED, 12...24 Vdc
ST 16 016	Mounting frame for relay, without marking
ST 17 002	Jumper bar 2 pole
ST 17 005	Jumper bar 5 pole
ST 17 010	Jumper bar 10 pole
ST 16 040	Marking plate, consisting of 100 marking tags



Available sets

Set consisting of: relay in mounting frame, mounted on socket	
Product code	
ST 1P3 024	24 Vdc, AgSnO contacts
ST 1P3 L12	12 Vdc, with LED, AgSnO contacts
ST 1P3 L24	24 Vdc, with LED, AgSnO contacts
ST 1P3 L48	48 Vdc, with LED, AgSnO contacts
ST 1P2 L24	24 Vdc, with LED, AgSnO gold plated contacts