

Safety Relay SR4

4 pole 8 A



Features

- Forcibly guided contacts according to EN 50205
- 4 pole safety relay with either 2 N/O+2 N/C or 3 N/O+1 N/C contacts
- Very small outlines

Applications

Emergency shut-off, machine control, elevator and escalator control, light barrier control

F0244-A




Technical data of approved types on request

in preparation

Contact data

Configuration	3 N/O contact and 1 N/C contact or 2 N/O contact and 2 N/C contact
Type of contact	single contact, forcibly guided
Continuous thermal load	8 A
Rated voltage / max. breaking voltage AC	250 Vac / 440 Vac
Maximum breaking capacity AC	2000 VA
Contact material	AgSnO
Minimum contact load	> 50 mW
Contact resistance	≤100 mΩ / 1 A / 24 Vdc ≤20 Ω / 10 mA / 5 Vdc

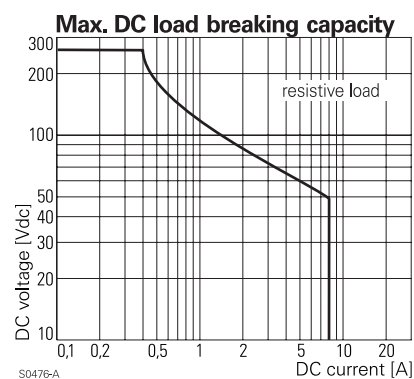

Coil data


Nominal voltage	5...110 Vdc
Nominal coil power	800 mW
Operative range	2

Coil versions

Coil code	Nominal voltage Vdc	Pull-in voltage Vdc	Release voltage Vdc	Coil resistance Ω	Coil current mA
005	5	3.8	0.5	31±10%	161.3
006	6	4.5	0.6	45±10%	133.3
009	9	6.8	0.9	101±10%	89.1
012	12	9.0	1.2	180±10%	66.7
015	15	11.3	1.5	281±10%	53.4
018	18	13.5	1.8	405±10%	44.4
021	21	15.8	2.1	551±10%	38.1
024	24	18.0	2.4	720±10%	33.3
036	36	27.0	3.6	1620±10%	22.2
040	40	30.0	4.0	2000±10%	20.0
048	48	36.0	4.8	2880±10%	16.7
060	60	45.0	6.0	4500±10%	13.3
085	85	63.8	8.5	9031±10%	9.4
110	110	82.5	11.0	15125±10%	7.3

All figures are given for coil without preenergization, at ambient temperature +20 °C
 $U_{op\ max}$: at 70 °C after preenergization with $1.1 \times U_{nom}$ the max. operate voltage is 85% of U_{nom} .
 U_{max} : at 70 °C the max. coil voltage is $1.1 \times U_{nom}$

Other coil voltages on request

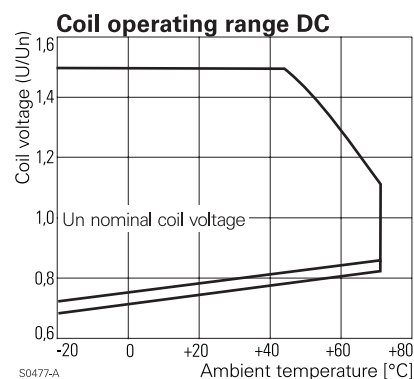

Safety Relay SR4

4 pole 8 A

Insulation


Dielectric strength	coil-contacts	4000 V _{rms}
	open contact circuit	1000 V _{rms}
	adjacent contacts	2500 V _{rms}
Clearance / creepage	coil-contact	10 / 10 mm
	adjacent contacts	3 / 3.5 mm
Insulation to IEC 60664		
	Voltage rating	250 V
	Pollution degree	2
	Overvoltage category	III
Insulation resistance (500 Vdc)		> 1x10 ⁶ Ω
Tracking resistance of relay base		CTI 250

Other data

Ambient temperature	-25...+70 °C
Mechanical life	≥ 10x10 ⁶ operations
Max. switching rate at rated- / minimum load	6 min ⁻¹ / 300 min ⁻¹
Operate- / release time	typ. 12 / 20 ms
Vibration resistance N/O / N/C contact	> 8 / 2.5 g, 10...200 Hz
Category of protection (IEC 61810)	RT III - wash tight
Relay weight	16 g
Packaging unit	10 pcs.


PCB layout / terminal assignment

View on solder pins
Dimensions in mm




S0413-BC

2 N/O and 2 N/C contacts



S0413-BB


3 N/O and 1 N/C contacts



S0413-BA

Dimensions

Dimensions in mm

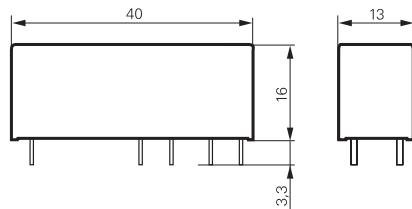

S0412-AH

Product key

Type

Contact configuration

D 2 N/O + 2 N/C contacts

M 3 N/O + 1 N/C contacts


Contact material

4 AgSnO

Coil

Coil code: please refer to coil versions table

Other types on request

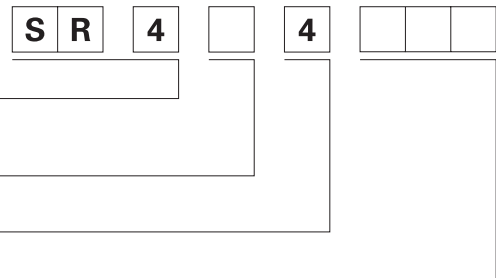

Rights to change data / design reserved