


Accessories Power Relay RM

2 / 3 pole, 10 / 16 A

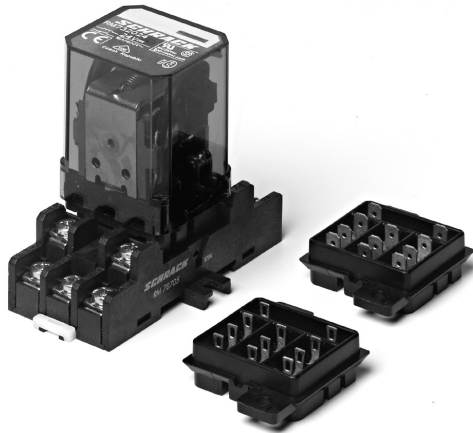


F0237-A

RM Sockets with screw-type terminals


RM 78 704

Socket with screw-type terminals


Dimensions in mm



F0113-A

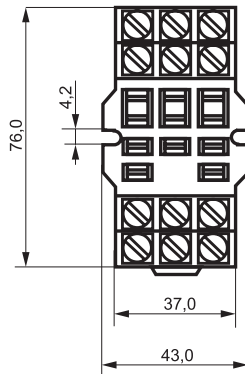

S0317-A




Technical data


Rated current	16 A
Rated voltage	380 Vac
Dielectric strength coil/cont.	>2500 V _{rms}
Ambient temperature	-40...+50 °C
Terminal torque	0.8 Nm
max.	1.2 Nm
Packaging unit	100 pcs.

RM 78 705


Socket with screw-type terminals

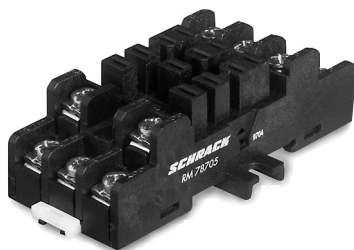

F0114-A

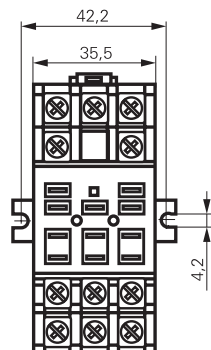

S0318-A

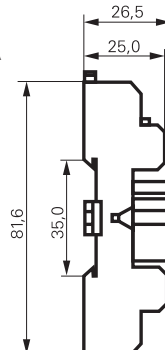

Technical data

Rated current	16 A
Rated voltage	250 Vac
Dielectric strength coil/cont.	>2500 V _{rms}
Ambient temperature	-40...+40 °C
Terminal torque	0.8 Nm
max.	1.2 Nm
Packaging unit	100 pcs.

Socket with screw-type terminals

Type

RM 78 704 Socket with screw-type terminals

RM 78 705 Socket with screw-type terminals

Accessories Power Relay RM


2 / 3 pole, 10 / 16 A

Dimensions in mm
View on solder pins

RM 78 700 Socket with Faston terminals




F0110-A

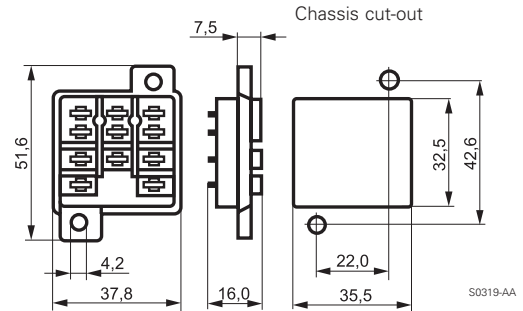

RM 78 701 Socket with solder terminals



F0111-A

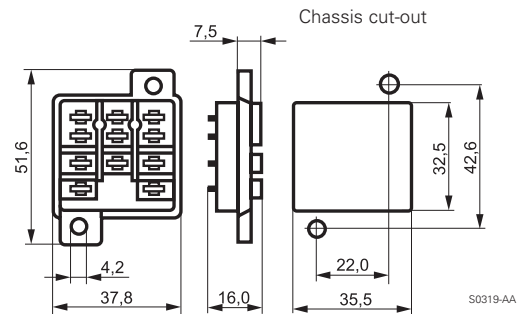


RM 78 702 Socket with PCB terminals

 300 Vac / 10 A



F0112-A

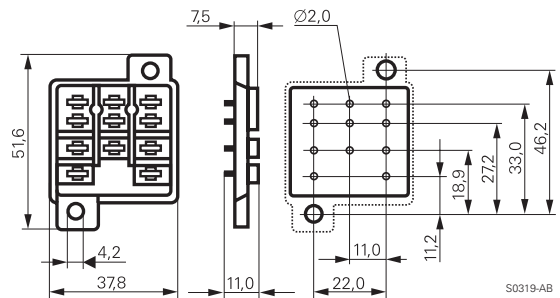

Sockets

Type

RM 78 700 Socket with Faston terminals

RM 78 701 Socket with solder terminals

RM 78 702 Socket with PCB terminals

Accessories for RM 78 700, RM 78 701, RM 78 702

Type

RM 28 802 Metal retaining clip RM